

BUILT
WITH SKILL.
FINISHED
WITH PRIDE.



PAUL MOLINA
STUCCO
CEMENT FINISH



At **Paul Molina Stucco Cement Finish**,
we transform surfaces into timeless
statements of strength and elegance.

Specializing in premium stucco and
cement finishes, we deliver refined
textures, lasting durability, and
exceptional craftsmanship for
residential, commercial, and
architectural spaces.

With a commitment to precision and
quality, every project we undertake
reflects our dedication to excellence
and attention to detail.

From concept to completion, our
solutions are designed to elevate
spaces and stand the test of time.

**BUILT BY SKILL.
FINISHED WITH PRIDE.**

ONE PRODUCT. ENDLESS POSSIBILITIES.

Paul Molina Stucco Cement is a **premium decorative cement** finish that transforms ordinary surfaces into extraordinary spaces.



PREMIUM
QUALITY



EASY
APPLICATION



ELEGANT
FINISH



INTERIOR &
EXTERIOR USE

AVAILABLE PRODUCTS



STUCCO CEMENT

20KG

Our original blend designed for smooth and elegant finishes.

- Perfect for smooth and troweled finishes
- Ideal for interior and exterior walls
- Strong, durable and long-lasting



SANDED STUCCO CEMENT

20KG

Enhanced with fine sand for natural texture and added strength.

- Creates natural, textured finishes
- Excellent adhesion and durability
- Ideal for rustic and architectural designs



STUCCO CEMENT SEALER

1 GAL

High-quality sealer that protects and enhances your finish.

- Protects against water and stains
- Enhances color and texture
- Clear matte finish for a natural look



COVERAGE
GUIDE
(Approximate)



SMOOTH FINISH
12 - 14 SQM
(2 COATS)
per 20kg bag



ROUGH FINISH
6 - 8 SQM
(2 COATS)
per 20kg bag



Quiet luxury
in texture.



Finishes

SIX FINISHES

Endless expression.

Each finish in our collection is carefully crafted to bring depth, character, and timeless beauty to your space.

01

VENETIAN

Soft movement.
Refined elegance.



02

STRIA

Subtle strokes.
Natural flow.



03

LINEA

Structured lines.
Modern rhythm.



04

CAST

Urban geometry. Raw
sophistication.



05

SMOOTH


Minimalist calm.
Effortless beauty.



06

SOD

Earthy layers.
Organic strength.



Surface Preparation

BEFORE APPLYING STUCCO



01 CLEAN

Remove dust, dirt, grease, paint, and other loose materials.



02 REPAIR

Check and repair cracks, gaps, and other surface defects.



03 WATERPROOF

Waterproof the surface as necessary.



04 DRY & CURE

Ensure the surface is dry and fully cured.



05 READY

Apply over bare concrete only. Good weather must persist before application.



SUITABLE SURFACES

P.M Stucco Cement can be applied on **concrete, plywood, fiber cement and painted surfaces.**

Tools You'll Need

FOR STUCCO APPLICATION

Having the right tools ensures a smooth application and a high-quality finish.

01

**MIXING
BUCKET**



02

**DRILL
MIXER**



03

**STAINLESS
STEEL TROWEL**



04

**WHITE
CLEAN RAG**




05

**SANDING
PAPER**



06

**MASKING
TAPE**



07

SPONGE



NOTE

Use clean tools and containers. Rinse tools with water immediately after use. Do not let the materials dry on your tools.

STUCCO CEMENT FINISH:

Signature Color Catalog

A curated palette of timeless neutrals and earthy tones designed to elevate spaces with texture, depth, and enduring beauty.



RECOMMENDED:

Minimalist accent walls & religious/artistic displays.

01 WHITE	02 90/10 LIGHT GREY	03 50/50 MEDIUM GREY	04 GREY	05 DARK GREY	06 TERRACOTTA	07 BEIGE
Light, clean, and timeless. Ideal for airy, minimalist spaces and highlighting architectural features.	Balanced and subtle. A refined light grey for soft, contemporary looks.	Versatile mid-tone grey that brings harmony and sophistication to any space.	Classic and balanced. A true grey that delivers a clean, modern, and timeless foundation.	Bold and dramatic. A high-contrast finish that creates depth and intimacy in any setting.	Rich and grounding. Adds warmth and Mediterranean character with a deeply textured presence.	Soft and organic. Creates a warm, welcoming atmosphere—perfect for cafes and communal spaces.



PLEASE NOTE

Actual colors may vary due to lighting and application method.



Always test a sample before full application.



OTHER COLORS AVAILABLE UPON REQUEST

A wide range of custom colors can be created to suit your project.



WE ALSO OFFER SANDED STUCCO CEMENT

Our Signature Colors are available in Sanded Stucco Cement finish, offering a refined, natural texture with added depth and character.





Venetian

PAUL MOLINA
STUCCO CEMENT FINISH

Venetian

APPLICATION GUIDE



01 SURFACE PREPARATION

Ensure the surface is clean, dry, and stable. Remove dust, dirt, oil, and loose particles. Repair cracks and level any uneven areas for a smooth finish.



02 PRIMER (OPTIONAL)

Apply a suitable primer or sealer to enhance adhesion, and even out the surface absorbency. Allow it to dry completely before proceeding.



03 FIRST COAT

Apply a thin, even layer of the mixed stuff using a stainless steel trowel. Spread smoothly and uniformly. Allow to dry completely.



04 SECOND COAT

Apply a second thin layer using irregular, overlapping strokes in different directions to create natural movement and depth.



05 COMPRESSION

Once partially, gently burnish the surface using light pressure with a clean trowel. This compacts the surface and enhances the smooth, polished Venetian effect.



06 DRYING & CURING

Allow the finish to cure for at least 24–48 hours. Protect the surface from direct rain, strong sunlight, and moisture during the curing period.



07 PROTECTION

For added durability and easy maintenance, apply the recommended sealer after complete curing.

MIXING INSTRUCTIONS



Recommended Ratio
(For 20kg Stucco Cement)

6 – 7 LITERS

Clean Water

+

20 KG

Stucco Cement Finish

MIXING PROCEDURE

- 1 Pour clean water into a mixing bucket.
- 2 Gradually add the stucco cement while mixing.
- 3 Use a low-speed drill mixer to blend until smooth and lump-free.
- 4 Mix for 3–5 minutes to achieve a creamy, uniform consistency.
- 5 Let the mixture rest for 3–5 minutes before application.

SEALER APPLICATION (AFTER CURING)

01 SURFACE CLEANING

Ensure the surface is completely clean, dry, and free from dust or debris before applying the sealer.

02 APPLY THE SEALER

Apply Paul Molina Stucco Cement Sealer using a clean cloth. Wipe the surface evenly in a thin coat.

03 DRYING TIME

Allow the sealer to dry for 1–2 hours depending on temperature and humidity.

04 PROTECTION & CURING

Allow 24 hours before exposing the surface to water heavy use for optimal performance.



Stria

PAUL MOLINA
STUCCO CEMENT FINISH



APPLICATION GUIDE



01 SURFACE PREPARATION

Ensure the surface is clean, dry, and stable. Remove dust, dirt, oil, and loose particles. Repair cracks and level any uneven areas for a smooth base.



02 PRIMER (OPTIONAL)

Apply a suitable primer or sealer to enhance adhesion and even out the surface absorbency. Allow it to dry completely before proceeding.



03 BASE COAT

Apply a thin, even layer of Sanded Stucco Cement using a stainless steel trowel. Spread smoothly and uniformly. Allow to dry until firm.



04 APPLICATION

Apply another layer of Sanded Stucco Cement at a thickness of 2–3mm using a stainless steel trowel. Work in small sections for consistency.



05 TEXTURE CREATION (STRIA FINISH)

While the material is still workable, use a plastic or sponge float in a light circular or irregular motion. Do not overwork. This creates the natural stria texture with fine sandy grains.



06 REFINEMENT

Lightly skim or smooth any harsh lines using the trowel with minimal pressure. Avoid over-smoothing to maintain the natural texture and tiny sand details.



07 DRYING & CURING

Allow the finish to cure for at least 24–48 hours. Protect the surface from direct rain, strong sunlight, and moisture during the curing period.



08 PROTECTION

For added durability and easy maintenance, apply the recommended sealer after complete curing.

MIXING INSTRUCTIONS



Recommended Ratio
(For 20kg Stucco Cement)

6 – 7 LITERS

Clean Water

+

20 KG

Sanded Stucco Cement Finish

MIXING PROCEDURE

- 1 Pour clean water into a mixing bucket.
- 2 Gradually add the stucco cement while mixing.
- 3 Use a low-speed drill mixer to blend until smooth and lump-free.
- 4 Mix for 3–5 minutes to achieve a creamy, uniform consistency.
- 5 Let the mixture rest for 3–5 minutes before application.

SEALER APPLICATION (AFTER CURING)

01 SURFACE CLEANING

Ensure the surface is completely clean, dry, and free from dust or debris before applying the sealer.

02 APPLY THE SEALER

Apply Paul Molina Stucco Cement Sealer using a clean cloth. Wipe the surface evenly in a thin coat.

03 DRYING TIME

Allow the sealer to dry for 1–2 hours depending on temperature and humidity.

04 PROTECTION & CURING

Allow 24 hours before exposing the surface to water heavy use for optimal performance.



Linea

PAUL MOLINA
STUCCO CEMENT FINISH



APPLICATION GUIDE



01 SURFACE PREPARATION

Ensure the surface is clean, dry, and stable. Remove dust, dirt, oil, and loose particles. Repair cracks and level any uneven areas for a smooth base.



02 PRIMER (OPTIONAL)

Apply a suitable primer or sealer to enhance adhesion and even out the surface absorbency. Allow it to dry completely before proceeding.



03 BASE COAT

Apply a thin, even layer of Sanded Stucco Cement using a stainless steel trowel. Spread smoothly and uniformly. Allow to dry until firm.



04 LINE CREATION

Lay out the lines according to your preferred thickness or thinness. Use a line tool and masking tape as a guide to create the lines.



05 SECOND COATING

Apply the second coating to build depth and refine the texture. Ensure even coverage over the surface for a clean and consistent finish.



06 REFINEMENT

Inspect the lines and surface. Remove the masking tape once the second coating is dried.



07 DRYING & CURING

Allow the finish to cure for at least 24–48 hours. Protect the surface from direct rain, strong sunlight, and moisture during the curing period.



08 PROTECTION

For added durability and easy maintenance, apply the recommended sealer after complete curing.

MIXING INSTRUCTIONS



Recommended Ratio
(For 20kg Stucco Cement)

6 – 7 LITERS

Clean Water

+

20 KG

Sanded Stucco Cement Finish

MIXING PROCEDURE

- 1 Pour clean water into a mixing bucket.
- 2 Gradually add the stucco cement while mixing.
- 3 Use a low-speed drill mixer to blend until smooth and lump-free.
- 4 Mix for 3–5 minutes to achieve a creamy, uniform consistency.
- 5 Let the mixture rest for 3–5 minutes before application.

SEALER APPLICATION (AFTER CURING)

01 SURFACE CLEANING

Ensure the surface is completely clean, dry, and free from dust or debris before applying the sealer.

02 APPLY THE SEALER

Apply Paul Molina Stucco Cement Sealer using a clean cloth. Wipe the surface evenly in a thin coat.

03 DRYING TIME

Allow the sealer to dry for 1–2 hours depending on temperature and humidity.


04 PROTECTION & CURING

Allow 24 hours before exposing the surface to water heavy use for optimal performance.



Cast

PAUL MOLINA
STUCCO CEMENT FINISH

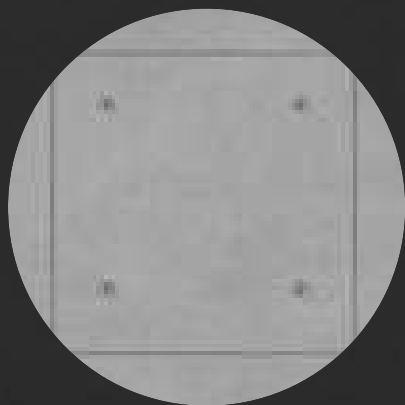

APPLICATION GUIDE



01 SURFACE PREPARATION

Ensure the surface is clean, dry, and stable. Remove dust, dirt, oil, and loose particles. Repair cracks and level any uneven areas for a smooth base.



02 PRIMER (OPTIONAL)

Apply a suitable primer or sealer to enhance adhesion and even out the surface absorbency. Allow it to dry completely before proceeding.



03 BASE COAT

Apply a thin, even layer of Sanded Stucco Cement using a stainless steel trowel. Spread smoothly and uniformly. Allow to dry until firm.



04 LINE CREATION

Lay out the lines according to your preferred thickness or thinness. Use a line tool and masking tape as a guide to create the lines.



05 SECOND COATING

Apply the second coating to build depth and refine the texture. Ensure even coverage over the surface for a clean and consistent finish.



06 REFINEMENT

Inspect the lines and surface. Remove the masking tape once the second coating is dried.



07 DRYING & CURING

Allow the finish to cure for at least 24–48 hours. Protect the surface from direct rain, strong sunlight, and moisture during the curing period.



08 CREATION OF BUTTONS

After the second coating is completely dry, create the buttons on the cast finish using a drill bit. Choose the diameter that you prefer. Make sure the holes are smooth and spaced. Use a level and measuring guide to ensure accuracy.



09 PROTECTION

For added durability and easy maintenance, apply the recommended sealer after complete curing.

MIXING INSTRUCTIONS



Recommended Ratio
(For 20kg Stucco Cement)

6 – 7 LITERS

Clean Water

+

20 KG

Stucco Cement Finish

MIXING PROCEDURE

- 1 Pour clean water into a mixing bucket.
- 2 Gradually add the stucco cement while mixing.
- 3 Use a low-speed drill mixer to blend until smooth and lump-free.
- 4 Mix for 3–5 minutes to achieve a creamy, uniform consistency.
- 5 Let the mixture rest for 3–5 minutes before application.

SEALER APPLICATION (AFTER CURING)

01 SURFACE CLEANING

Ensure the surface is completely clean, dry, and free from dust or debris before applying the sealer.

02 APPLY THE SEALER

Apply Paul Molina Stucco Cement Sealer using a clean cloth. Wipe the surface evenly in a thin coat.

03 DRYING TIME

Allow the sealer to dry for 1–2 hours depending on temperature and humidity.

04 PROTECTION & CURING

Allow 24 hours before exposing the surface to water heavy use for optimal performance.



Smooth

PAUL MOLINA
STUCCO CEMENT FINISH



Smooth

APPLICATION GUIDE



01 SURFACE PREPARATION

Ensure the surface is clean, dry, and stable. Remove dust, dirt, oil, and loose particles. Repair cracks and level any uneven areas for a smooth finish.



02 PRIMER (OPTIONAL)

Apply a suitable primer or sealer to enhance adhesion, and even out the surface absorbency. Allow it to dry completely before proceeding.



03 FIRST COAT

Apply a thin, even layer of the mixed stuff using a stainless steel trowel. Spread smoothly and uniformly. Allow to dry completely.



04 SECOND COAT

Apply a second thin layer using regular, overlapping strokes in different directions to create natural movement and depth.



06 DRYING & CURING

Allow the finish to cure for at least 24–48 hours. Protect the surface from direct rain, strong sunlight, and moisture during the curing period.



07 PROTECTION

For added durability and easy maintenance, apply the recommended sealer after complete curing.

MIXING INSTRUCTIONS



Recommended Ratio
(For 20kg Stucco Cement)

6 – 7 LITERS

Clean Water

+

20 KG

Stucco Cement Finish

MIXING PROCEDURE

- 1 Pour clean water into a mixing bucket.
- 2 Gradually add the stucco cement while mixing.
- 3 Use a low-speed drill mixer to blend until smooth and lump-free.
- 4 Mix for 3–5 minutes to achieve a creamy, uniform consistency.
- 5 Let the mixture rest for 3–5 minutes before application.

SEALER APPLICATION (AFTER CURING)

01 SURFACE CLEANING

Ensure the surface is completely clean, dry, and free from dust or debris before applying the sealer.

02 APPLY THE SEALER

Apply Paul Molina Stucco Cement Sealer using a clean cloth. Wipe the surface evenly in a thin coat.

03 DRYING TIME

Allow the sealer to dry for 1–2 hours depending on temperature and humidity.

04 PROTECTION & CURING

Allow 24 hours before exposing the surface to water heavy use for optimal performance.



SOD

PAUL MOLINA
STUCCO CEMENT FINISH



APPLICATION GUIDE



01 SURFACE PREPARATION

Ensure the surface is clean, dry, and stable. Remove dust, dirt, oil, and loose particles. Repair cracks and level any uneven areas for a smooth base.



02 PRIMER (OPTIONAL)

Apply a suitable primer or sealer to enhance adhesion and even out the surface absorbency. Allow it to dry completely before proceeding.



03 BASE COAT

Apply a thin, even layer of Sanded Stucco Cement using a stainless steel trowel. Spread smoothly and uniformly. Allow to dry until firm.



04 APPLICATION

Apply another layer of Sanded Stucco Cement or Regular Stucco Cement at a thickness of 2–3mm using a stainless steel trowel. Work in small sections for consistency.



05 TEXTURE CREATION (SOD FINISH)

While the material is still workable, use a plastic or sponge float in a light circular or irregular motion. Do not overwork. This creates the natural stria texture with fine sandy grains.



06 DRYING & CURING

Allow the finish to cure for at least 24–48 hours. Protect the surface from direct rain, strong sunlight, and moisture during the curing period.



07 PROTECTION

For added durability and easy maintenance, apply the recommended sealer after complete curing.

MIXING INSTRUCTIONS



Recommended Ratio
(For 20kg Stucco Cement)

6 – 7 LITERS

Clean Water

+

20 KG

Sanded Stucco Cement Finish

MIXING PROCEDURE

- 1 Pour clean water into a mixing bucket.
- 2 Gradually add the stucco cement while mixing.
- 3 Use a low-speed drill mixer to blend until smooth and lump-free.
- 4 Mix for 3–5 minutes to achieve a creamy, uniform consistency.
- 5 Let the mixture rest for 3–5 minutes before application.

SEALER APPLICATION (AFTER CURING)

01 SURFACE CLEANING

Ensure the surface is completely clean, dry, and free from dust or debris before applying the sealer.

02 APPLY THE SEALER

Apply Paul Molina Stucco Cement Sealer using a clean cloth. Wipe the surface evenly in a thin coat.

03 DRYING TIME

Allow the sealer to dry for 1–2 hours depending on temperature and humidity.

04 PROTECTION & CURING

Allow 24 hours before exposing the surface to water heavy use for optimal performance.

REAL PROJECTS. REAL RESULTS.

From homes to commercial spaces, our finishes bring visions to life. Each project is a reflection of quality materials, skilled artisans, and attention to detail that lasts.



RESIDENTIAL
PROJECTS



COMMERCIAL
PROJECTS



ACCENT
WALLS



FEATURE
WALLS



EXTERIOR
WALLS



PROJECT
GALLERY

EXTERIOR WALL FINISH | SMOOTH FINISH | COLOR: GRAY



LIVING ROOM | SMOOTH FINISH | COLOR: 90-10



COMMERCIAL PROJECT | VENETIAN | COLOR: BEIGE



ACCENT WALL | SOD FINISH | COLOR: TERRACOTTA



BEDROOM | SMOOTH FINISH | COLOR: 90/10



FEATURE WALL | VENETIAN | COLOR: DARK GREY



EXTERIOR WALL | SOD FINISH | COLOR: DARK GRAY



**BEAUTIFUL FINISHES.
BUILT TO LAST.**

Every wall tells a story. We are proud to be part of spaces that inspire, comfort, and stand the test of time.

Crafted with Passion. Finished with Perfection.

Elevating spaces.
BUILT TO LAST.



PAUL MOLINA
STUCCO
CEMENT

BUILT STRONG. FINISHED RIGHT.

Paul Molina Stucco Cement delivers more than just a beautiful finish. It's a complete solution that combines strength, elegance, and lasting performance.



“ From the material we use to the finish we deliver, every detail is crafted with purpose.
THAT'S THE PAUL MOLINA PROMISE. ”



INTERIOR & EXTERIOR USE

Designed to perform beautifully in any space.



WEATHER RESISTANT

Formulated to withstand harsh weather conditions.



ECO CONSCIOUS

A more sustainable choice for responsible building.



PROFESSIONAL GRADE

Preferred by architects, constructors, and design professionals.

WHY CHOOSE
PAUL MOLINA



DURABLE

Engineered for long-lasting performance. Resistant to cracking, chipping, and weather conditions.



ELEGANT

Timeless, refined finishes that add character, depth, and value to any space.



VERSATILE

Perfect for interior and exterior applications. Ideal for residential, commercial, and architectural projects.



EASY TO APPLY

Smooth application process with excellent workability—saves time without compromising quality.



COST EFFECTIVE

Premium look and superior quality without the premium price. Maximum value for your investment.



MULTIPLE FINISHES & COLORS

A wide range of textures and colors to bring your design vision to life.



LOW MAINTENANCE

Easy to clean and maintain—built to keep its beauty for years.



TRUSTED QUALITY

Made with carefully selected materials and crafted to meet professional standards.

Elevating spaces.
BUILT TO LAST.

PAUL MOLINA
STUCCO CEMENT FINISH





SHOPEE

<https://ph.shp.ee/U8Gkcs1>



LAZADA

<https://s.lazada.com.ph/s.iiDel>



TIKTOK SHOP

Paul Molina Stucco Cement Finish



IG / FB

[paulmolina.stuccocementfinish](https://paulmolina.stuccocementfinish.com/)



WEBSITE

<https://paulmolina.stuccocementfinish.com/>



CONTACT

+63 954 417 1462

+63 906 486 2887



ADDRESS

B6 L13arnation St.

Dolmar GoldenHills Loma De Gato

Marilao, Bulacan 3019